

VALVE REGULATED LEAD ACID BATTERY - UPS TYPE



ABSORBENT GLASS MAT - AGM TECHNOLOGY

ECT-UP12120VA18 **12V120Ah**



Dimensions

mm

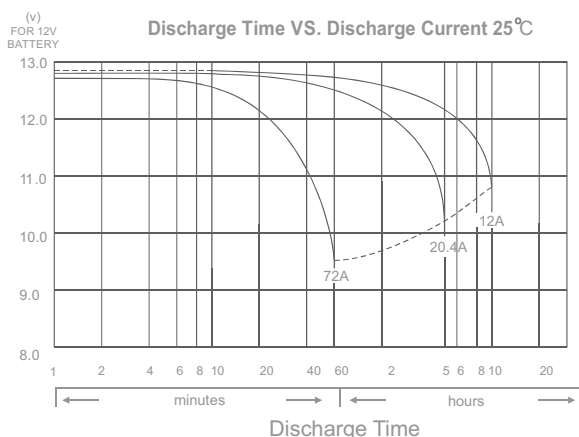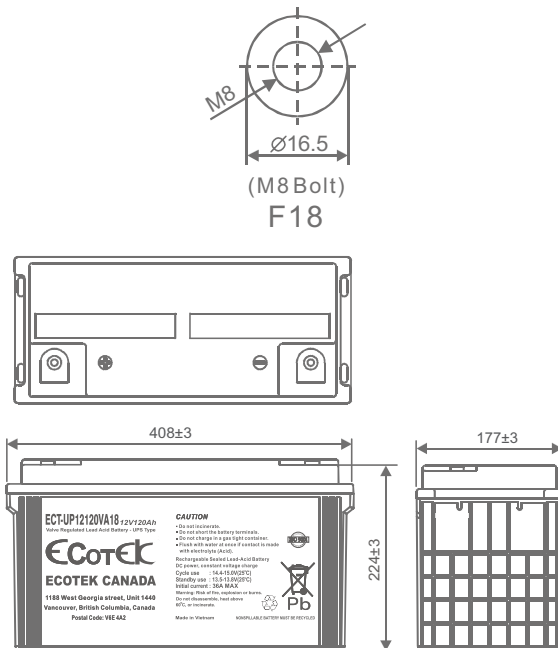

Specifications

Nominal Voltage(V) 12V

Nominal Capacity

10 hour rate	(12A to 10.80V)	120Ah
5 hour rate	(20.4A to 10.20V)	102Ah
1 hour rate	(72A to 9.60V)	72Ah

Weight Approx. 37kg

Internal Resistance (at 1KHz) Approx. 4 mΩ

Maximum Discharge Current for

5 seconds: 1200A

Charging Methods at 25°C(77°F)

Cycle use:	
Charging Voltage	14.4 to 15.0V
Coefficient -5.0mV/°C/cell	
Maximum Charging Current	36A
Standby use:	
Float Charging Voltage	13.50 to 13.80V
Coefficient -3.0mV/°C/cell	

Operating Temperature Range

Charge	-15°C(5°F) to 40°C(104°F)
Discharge	-15°C(5°F) to 50°C(122°F)
Storage	-15°C(5°F) to 40°C(104°F)

Design life 12 years

Charge Retention (shelf life) at 20°C(68°F)

1 month	98%
3 month	94%
6 month	85%

Case Material ABS UL94 HB

Option: Flammability resistance of (UL94 V-0)


Terminal F18

VALVE REGULATED LEAD ACID BATTERY - UPS TYPE


ABSORBENT GLASS MAT - AGM TECHNOLOGY

ECT-UP12120VA18 **12V120Ah**


Effect of Temperature on Capacity 25°C (77°F)

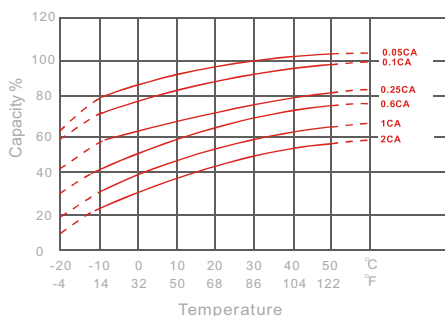


Trickle(or float) Service Life

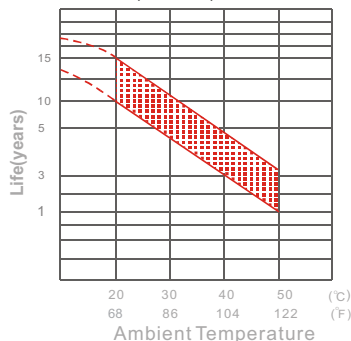

Capacity Retention Characteristic

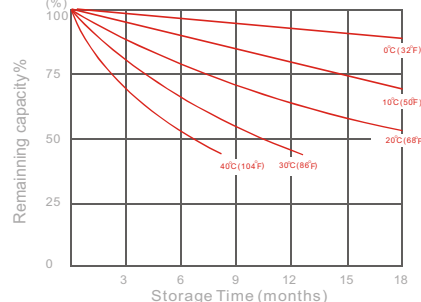

Cycle Service Life

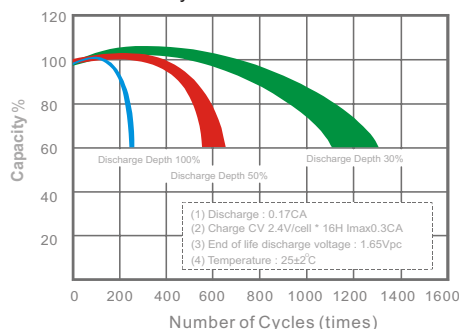

- PERFORMANCE DATA

- Discharge Rates in Watts to Various End Voltages at 25°C (77°F)

End Voltage		1.80V	1.75V	1.70V	1.65V	1.60V
Time						
10	min	388	415	437	461	486
15	min	332	358	371	384	396
30	min	209	216	224	231	238
45	min	161	165	168	183	184
60	min	130	134	138	144	148
90	min	93.0	95.6	97.7	102	105
180	min	55.7	56.8	57.8	59.4	62.2
300	min	38.9	39.3	40.2	40.8	41.5
480	min	27.3	27.8	28.1	28.5	28.8
600	min	23.4	23.9	24.2	24.4	24.5

- Discharge Rates in Amperes to Various End Voltages at 25°C (77°F)

End Voltage		1.80V	1.75V	1.70V	1.65V	1.60V
Time						
10	min	215	239	245	265	281
15	min	169	182	190	199	206
30	min	111	113	118	122	126
45	min	87.0	90.0	92.0	94.0	96.0
60	min	70.0	73.0	75.0	77.0	79.0
90	min	51.0	53.0	55.0	57.0	59.0
180	min	32.5	35.0	35.6	36.1	36.6
300	min	20.3	21.0	21.5	21.7	21.9
480	min	14.1	14.5	14.7	15.0	15.1
600	min	12.5	12.6	12.7	12.8	13.0

All data on the spec. sheet is an average value:

The tolerance range : $X < 6\text{min}$ (+15%~-15%),

$6\text{MIN} \leq X < 10\text{min}$ (+12%~-12%), $10\text{MIN} \leq X < 60\text{min}$ (+8%~-8%), $X \geq 60\text{min}$ (+5%~-5%)

Contents in this data sheet are subject to change for improvement without prior notice to users. For clarifications and updated information, please contact us.