

VALVE REGULATED LEAD ACID BATTERY - UPS TYPE


ABSORBENT GLASS MAT - AGM TECHNOLOGY

ECT-UP1226VA3 **12V26Ah**




Dimensions

mm

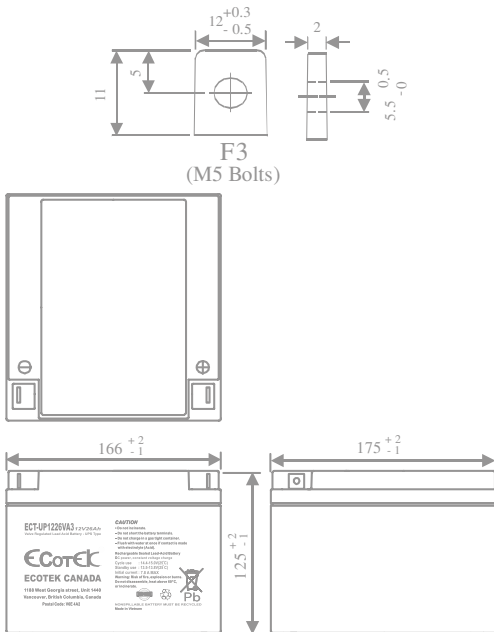

(V)
FOR 12V
BATTERY

Discharge Time VS. Discharge Current (25°C)

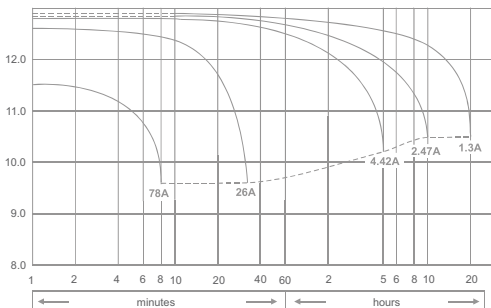

Discharge Time

Specifications

Nominal Voltage(V) 12V

Nominal Capacity

20 hour rate	(1.3A	to	10.50V)	26Ah
10 hour rate	(2.47A	to	10.50V)	24.7Ah
5 hour rate	(4.42A	to	10.20V)	22.1Ah
1 C	(26A	to	9.60V)	14.73Ah
3 C	(78A	to	9.60V)	10.4Ah

Weight

Approx. 9.3kg

Internal Resistance (at 1KHz)

Approx. 11 mΩ

Maximum Discharge Current for

5 seconds: 390A

Charging Methods at 25°C(77°F)

Cycle use:

Charging Voltage 14.4 to 15.0V

Coefficient -5.0mV/°C/cell

Maximum Charging Current 7.8A

Standby use:

Float Charging Voltage 13.50 to 13.80V

Coefficient -3.0mV/°C/cell

Operating Temperature Range

Charge -15°C(5°F) to 40°C(104°F)

Discharge -15°C(5°F) to 50°C(122°F)

Storage -15°C(5°F) to 40°C(104°F)

Charge Retention (shelf life) at 20°C(68°F)

1 month 92%

3 month 90%

6 month 80%

Case Material

ABS UL94 HB

Option: Flammability resistance of (UL94 V-0)

Terminal





F3



VALVE REGULATED LEAD ACID BATTERY - UPS TYPE

ABSORBENT GLASS MAT - AGM TECHNOLOGY

ECT-UP1226VA3 **12V26Ah**

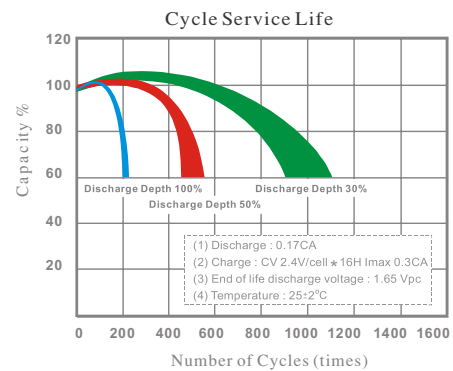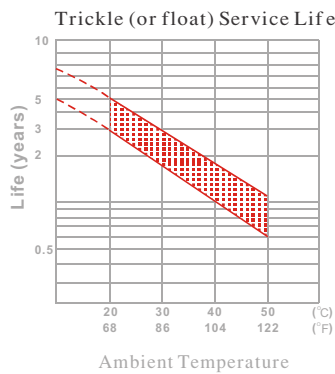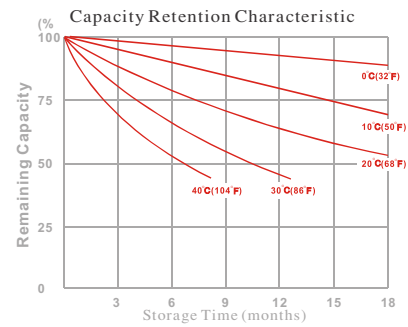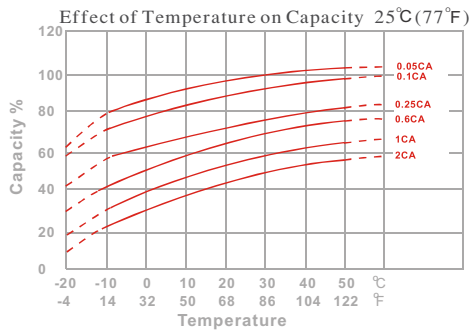

- PERFORMANCE DATA

- Discharge Rates in Watts to Various End Voltages at 25°C (77°F)

End Voltage		1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
Time								
5	min	147	161	173	185	191	196	208
10	min	108	114	119	125	128	131	135
15	min	78.7	84.0	88.2	92.2	94.2	96.0	99.5
30	min	42.3	45.3	47.2	48.7	49.5	50.3	51.3
60	min	30.2	31.7	32.4	32.8	33.2	33.5	33.8
120	min	19.2	19.8	20.2	20.7	20.8	21.0	21.2
180	min	12.8	13.2	13.4	13.6	13.6	13.7	13.8
240	min	10.3	10.5	10.7	10.8	10.9	10.9	11.0
300	min	8.75	8.90	8.98	9.07	9.10	9.15	9.37
600	min	5.42	5.52	5.58	5.66	5.68	5.72	5.75
1200	min	2.62	2.69	2.74	2.78	2.80	2.82	2.83

- Discharge Rates in Amperes to Various End Voltages at 25°C (77°F)

End Voltage		1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
Time								
5	min	78.9	92.9	103	109	111	113	115
10	min	55.6	62.1	64.2	68.2	70.4	72.3	75.7
15	min	40.8	46.4	49.8	52.6	54.3	54.9	56.2
30	min	21.4	23.8	25.2	26.5	27.2	27.8	28.8
60	min	15.3	16.1	16.5	16.9	17.1	17.3	17.5
120	min	9.34	9.72	9.87	10.0	10.1	10.2	10.3
180	min	6.45	6.63	6.72	6.83	6.87	6.92	6.99
240	min	5.48	5.61	5.69	5.76	5.79	5.84	5.91
300	min	4.77	4.86	4.93	5.00	5.02	5.05	5.08
600	min	2.55	2.61	2.65	2.69	2.71	2.74	2.77
1200	min	1.29	1.34	1.36	1.38	1.39	1.40	1.43

All data on the spec. sheet is an average value:

THE TOLERANCE RANGE : $X < 6\text{MIN}$ (+15%~-15%), $6\text{MIN} \leq X < 10\text{MIN}$ (+12%~-12%), $10\text{MIN} \leq X < 60\text{MIN}$ (+8%~-8%), $X \geq 60\text{MIN}$ (+5%~-5%)
 Contents in this data sheet are subject to change for improvement without prior notice to users. For clarifications and updated information, please contact us.

ECOTEK CANADA®

Ultimate Power for Changes

AUTHORIZED MASTER DISTRIBUTOR IN VIET NAM:

CÔNG TY NGUYỄN HÀ - STREAM COMPANY LIMITED

Địa chỉ : 3/4 Nguyễn Văn Thủ, P. Đa kảo, Quận 1, TP. HCM

Điện thoại : (028) 39.111.701 Fax: (028) 39.111.700

Email : phanphoi@ecotek-canada.vn

Website : www.ecotek-canada.vn Call center: 1800.1558