

VALVE REGULATED LEAD ACID BATTERY - UPS TYPE




ABSORBENT GLASS MAT - AGM TECHNOLOGY

ECT-RA129VA2 **12V9Ah**



Dimensions

mm

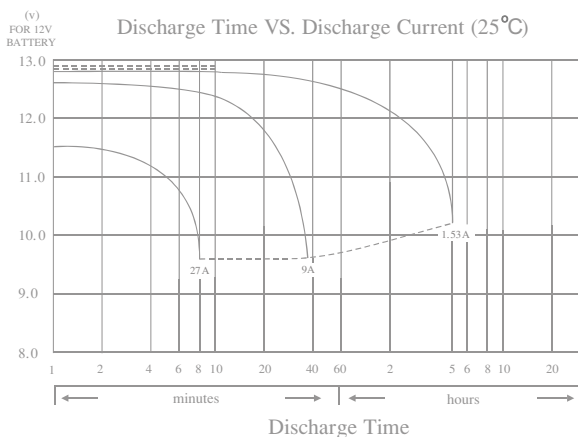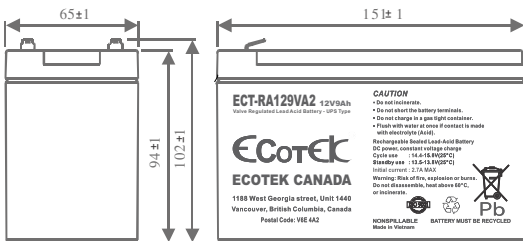

Specifications

Nominal Voltage(V) **12V**

Nominal Capacity

15 min rate	(216W	to	9.60V)	54Wh
20 hour rate	(0.451A	to	10.50V)	9.0Ah
5 hour rate	(1.53A	to	10.20V)	7.65Ah
1 C	(9A	to	9.60V)	5.7Ah
3 C	(27A	to	9.60V)	3.6Ah

Weight **Approx. 2.7kg**

Internal Resistance (at 1KHz) **Approx. 14 mΩ**

Maximum Discharge Current for

5 seconds: **135A**

Charging Methods at 25°C(77°F)

Cycle use:	
Charging Voltage	14.4 to 15.0V
Coefficient -5.0mV/°C/cell	
Maximum Charging Current	2.7A
Standby use:	
Float Charging Voltage	13.50 to 13.80V
Coefficient -3.0mV/°C/cell	

Operating Temperature Range

Charge	-15°C(5°F) to 40°C(104°F)
Discharge	-15°C(5°F) to 50°C(122°F)
Storage	-15°C(5°F) to 40°C(104°F)

Charge Retention (shelf life) at 20°C(68°F)

1 month	92%
3 month	90%
6 month	80%

Case Material **ABS**

Option: UL94 HB & UL94 V-0 Flame retardant

Terminal **F2 (Faston Tab 250)**




VALVE REGULATED LEAD ACID BATTERY - UPS TYPE


ABSORBENT GLASS MAT - AGM TECHNOLOGY

ECT-RA129VA2 12V9Ah


Effect of Temperature on Capacity 25°C (77°F)

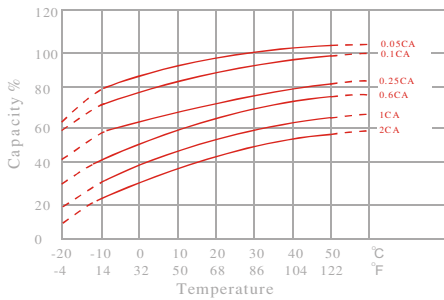


Trickle (or float) Service Life

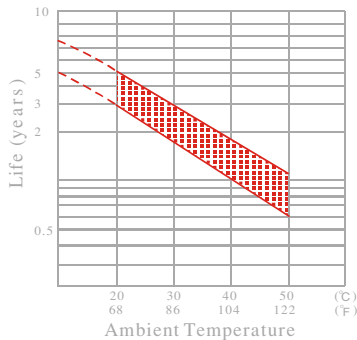

Capacity Retention Characteristic

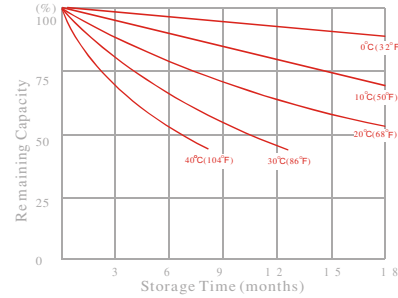

Cycle Service Life

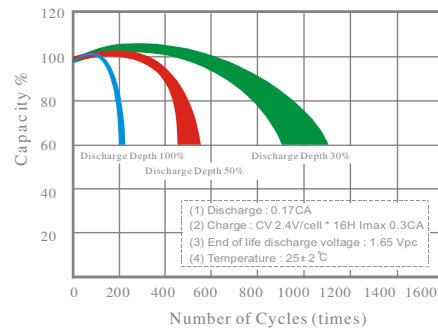

- PERFORMANCE DATA

- Discharge Rates in Watts to Various End Voltages at 25°C (77°F)

End Voltage		1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
Time								
5	min	342	361	388	407	419	427	448
10	min	219	234	252	264	271	277	290
15	min	181	187	194	200	204	208	216
30	min	94.7	97.3	102	106	107	108	114
60	min	59.8	62.4	64.2	65.8	66.7	67.6	68.8
120	min	32.4	33.4	34.1	34.9	35.2	35.4	35.7
180	min	25.2	26.1	26.9	27.7	28.0	28.5	29.1
240	min	20.4	21.2	21.8	22.4	22.7	23.1	23.5
300	min	17.3	17.9	18.3	18.6	18.7	18.9	19.1
600	min	9.73	10.1	10.3	10.5	10.6	10.7	10.8
1200	min	5.12	5.29	5.41	5.44	5.46	5.48	5.51

- Discharge Rates in Amperes to Various End Voltages at 25°C (77°F)

End Voltage		1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
Time								
5	min	30.4	32.6	35.0	36.7	37.4	38.5	40.3
10	min	19.1	20.4	21.9	22.9	23.4	24.1	25.2
15	min	14.3	14.9	15.8	16.5	16.8	17.3	18.0
30	min	8.09	8.45	8.93	9.35	9.54	9.77	10.2
60	min	5.17	5.29	5.37	5.45	5.48	5.52	5.57
120	min	2.63	2.72	2.78	2.84	2.86	2.89	2.93
180	min	2.12	2.18	2.23	2.27	2.29	2.31	2.34
240	min	1.69	1.74	1.77	1.80	1.81	1.82	1.83
300	min	1.46	1.51	1.53	1.55	1.56	1.57	1.58
600	min	0.827	0.841	0.855	0.866	0.871	0.877	0.884
1200	min	0.427	0.442	0.451	0.456	0.459	0.462	0.466

All data on the spec. sheet is an average value:

THE TOLERANCE RANGE : X<6MIN(+15%~-15%), 6MIN≤X<10MIN(+12%~-12%), 10MIN≤X<60MIN(+8%~-8%), X≥60MIN(+5%~-5%)

Contents in this data sheet are subject to change for improvement without prior notice to users. For clarifications and updated information, please contact us.

ECOTEK CANADA®

Ultimate Power for Changes

AUTHORIZED MASTER DISTRIBUTOR IN VIET NAM:

CÔNG TY NGUYỄN HÀ - STREAM COMPANY LIMITED

Địa chỉ : 3/4 Nguyễn Văn Thủ, P. Đa káo, Quận 1, TP. HCM

Điện thoại : (028) 39.111.701 Fax: (028) 39.111.700

Email : phanphoi@ecotek-canada.vn

Website : www.ecotek-canada.vn Call center: 1800.1558

